





	.....	1
1	.....	1
2	.....	1
3	.....	1
4	.....	1
	.....	1
	.....	3
1	RS485 .....	3
2	4-20mA/0-10V .....	3
	.....	4
1	RS485 .....	4
2	.....	4
	.....	5
1	.....	5
2	Modbus .....	5
3	.....	6
4	.....	7
	.....	8
1	.....	8
2	.....	8
3	.....	8
	.....	10
1	.....	10
2	.....	10
	.....	11
	.....	11
	.....	12



1


2

- DC7-30V
- RS485
- 
- LED

3

- 1~200ppm( )
- RS485
- Modbus RTU
- 4-20mA 0-10V
- 0-255
- 2400,4800,9600,19200,38400,115200( 9600)


4

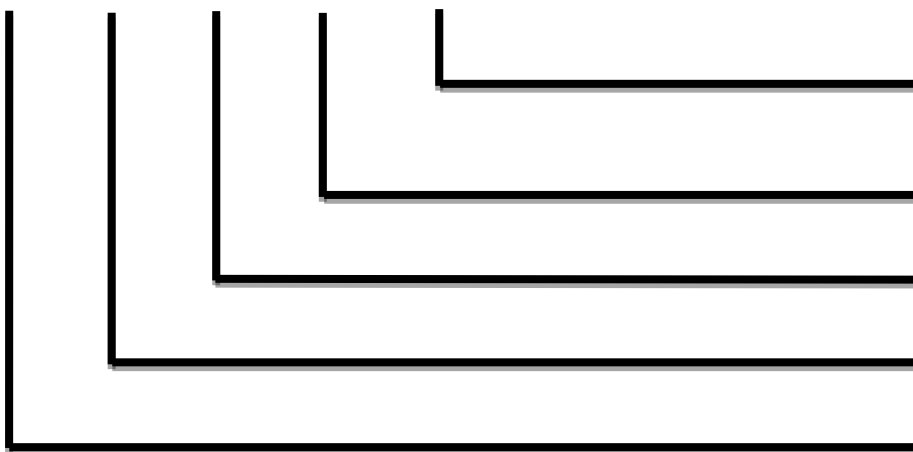







# 1 RS485

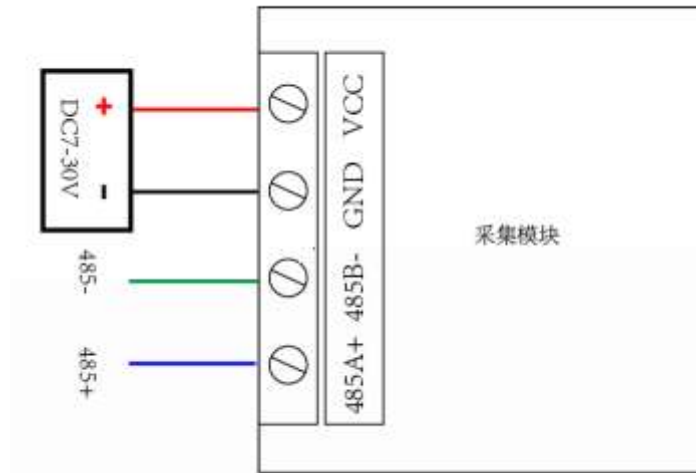



# 2 4-20mA/0-10V

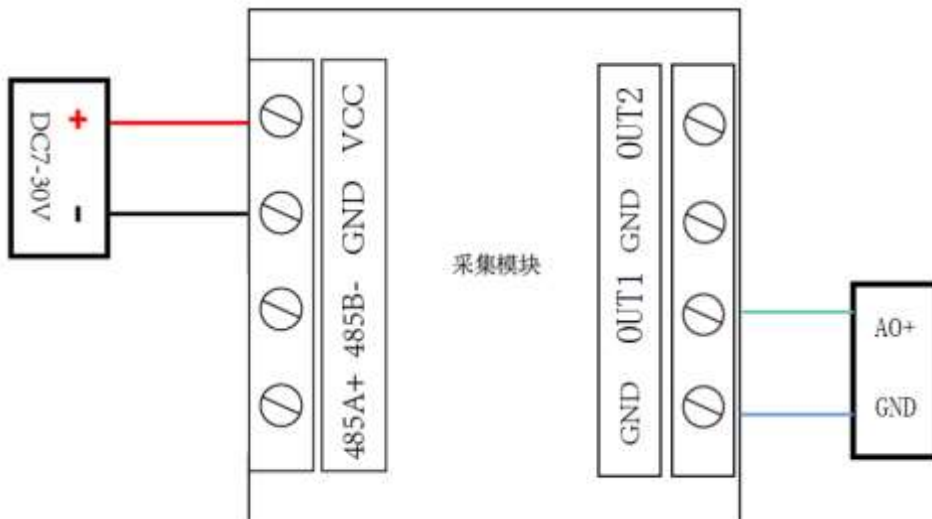





# 1 RS485

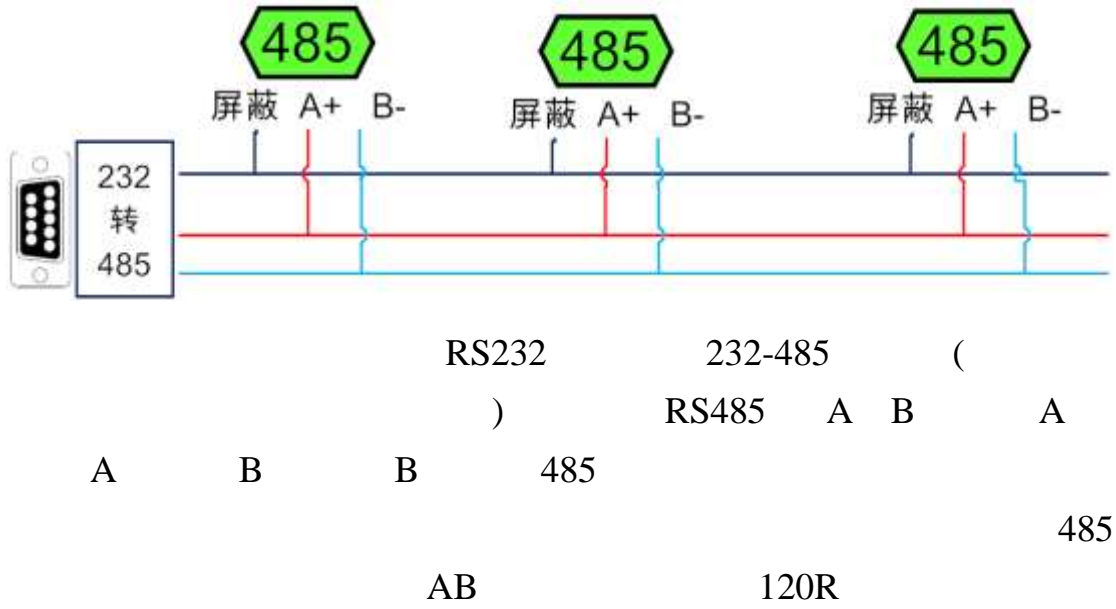

# 2

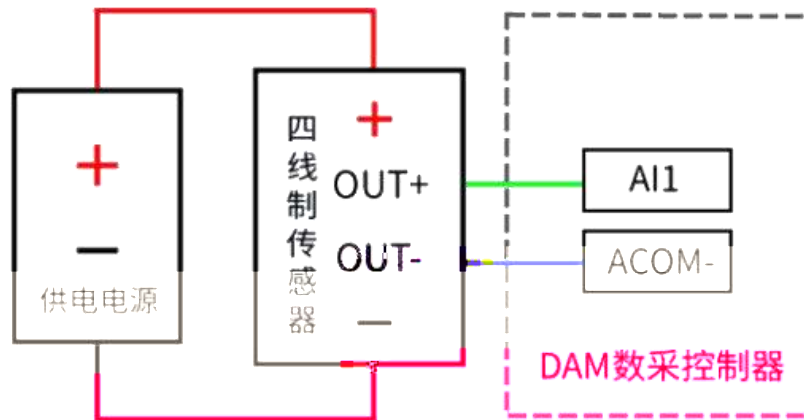



# 1

modbus  
MODBUS

Modbus

<http://www.juyingele.com.cn/software/software/Modbus%20POLL>

.rar

## 2 Modbus

	04	0	uint16_t
	03	300	0096 150ppm
	06	1000	0
		1002	= +

Modbus

PLC

---



---

1 1000



Bit0~Bit7		0 9600 1 2400 2 4800 3 9600 4 19200 5 38400 6 115200 7 57600 8 56000 9 14400 10 1200
Bit8~Bit9		0 1 (Even) 2 (Odd)
Bit10~Bit11		0 1 1 2 2 1.5

### 3

	RTU (16 )	
	<i>FE 04 00 00 00 01 25 C5</i>	0
	<i>FE 04 02 00 96 2D 4A</i>	0096=150ppm
	<i>FE 03 01 2C 00 01 50 30</i>	300
	<i>FE 03 02 00 96 2C 3E</i>	0096=150ppm

	RTU (16 )	
	<i>FE 04 03 E8 00 01 A5 B5</i>	
	<i>FE 04 02 00 02 2C E5</i>	02
	<i>FE 06 03 EA 00 02 3D B4</i>	02
	<i>FE 06 03 EA 00 02 3D B4</i>	02



**4**

=

*FE 04 00 00 00 01 25 C5*

FE		
04	04	
00 00		
00 01		
25 C5	CRC16	

*FE 04 02 00 96 2D 4A*

FE		
04	04	0x82
02		$1+(n-1)/8$
00 96	AD	=0x0096= 150ppm
2D 4A	CRC16	

*FE 06 03 EA 00 02 3D B4*

FE		
06	06	
03 EA		
00 02		
3D B4	CRC16	

*FE 06 03 EA 00 02 3D B4*

FE		
06	06	
03 EA		
00 02		
3D B4	CRC16	




1

<http://www.juyingele.com.cn/software/software/> DAM

.rar


2

JYDAM

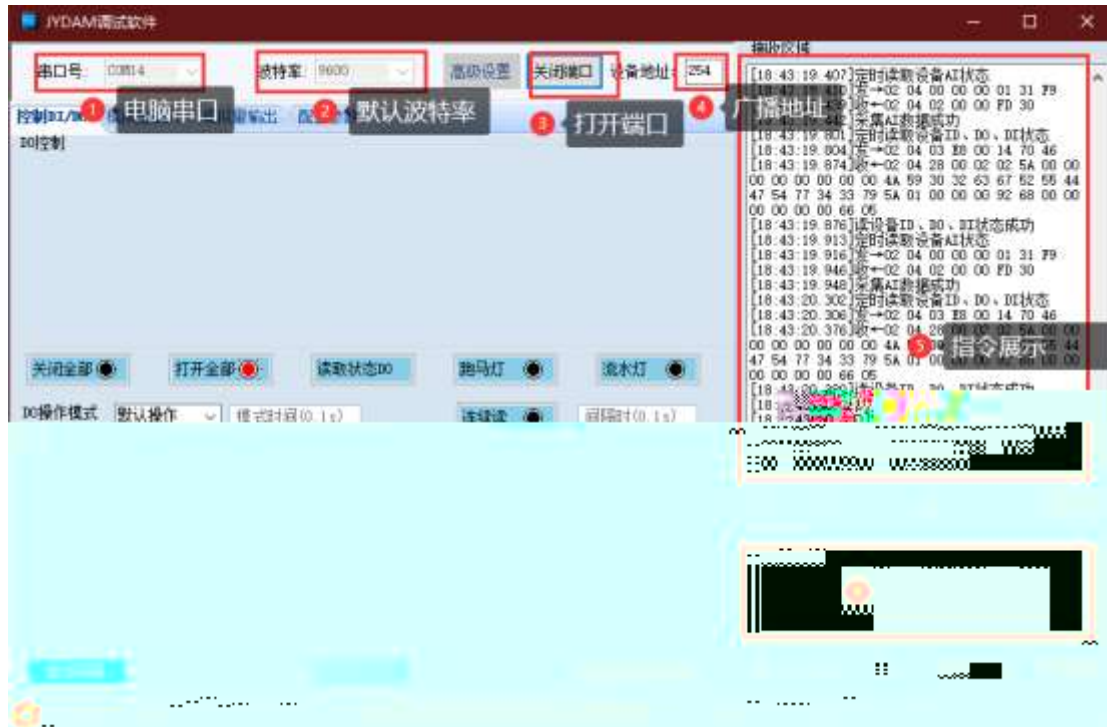

9600

3

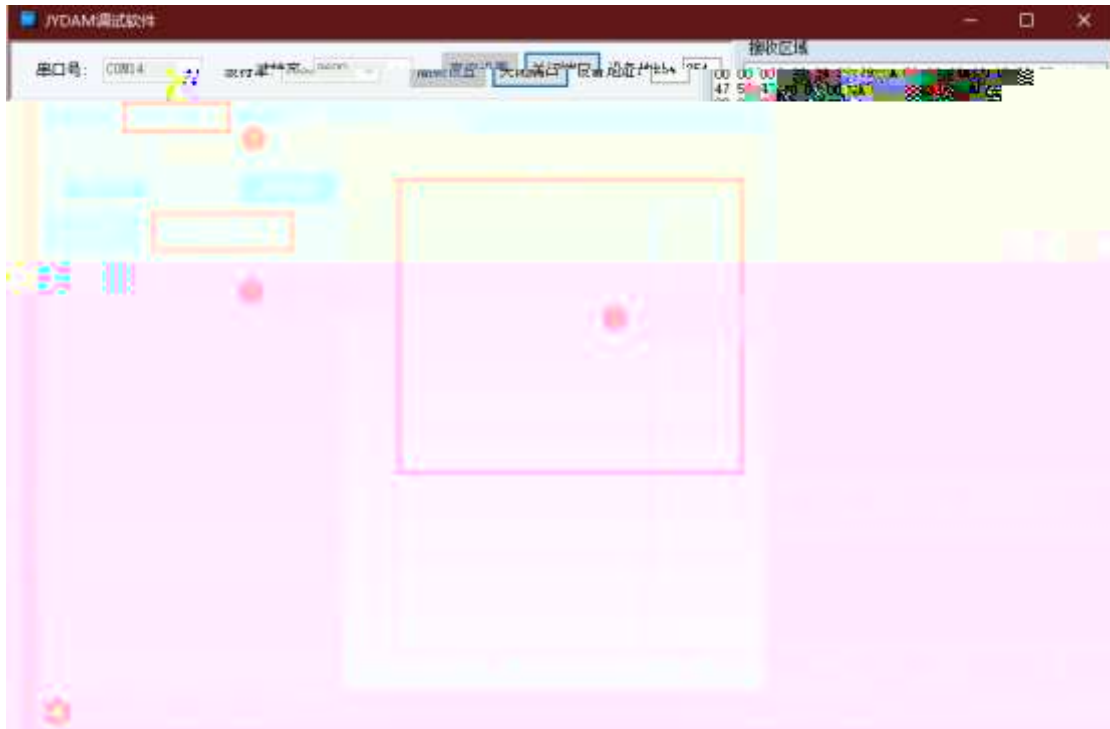



# 1

## 1.1

DAM    1    254    0  
=

## 1.2

254

控制DI/DO   模拟量输入   模拟量输出   配置参数

产品信息

产品ID JY741perWx55WqSy   DO数量 8   生产日期 1705   设置

产品型号 74   ID不匹配   DI数量 8   设备次序 001   下一

设备地址 1   AI数量 8   已注册    模拟设备

① 查看地址

## 1.3

JYDAM

基本参数

波特率 9600   DO工作模式 正常模式   读取   ① 读取偏移地址

485波特率 9600   DO工作模式参数 10   设定   ③ 点击设定

偏移地址 0   ② 写入地址

# 2

基本参数

波特率 38400   ② 选择波特率   正常模式   读取   ① 点击读取波特率

485波特率 38400   DO工作模式参数 10





1 485

254

2

4mA 0 20mA

3

4

12V

5

5

400-6688-400 010-82899827/1-803

QQ 3323725294 2986784459

