


- 4000-




- .012 3
- 45678 3
- 9 , ; \$ </4=> 3
- 6 3
- 3
- ?88 3
- 3
- ? 3


3
= + (=) 3
3



" # \$ % " !
& # ' ' (!
% " !
) !

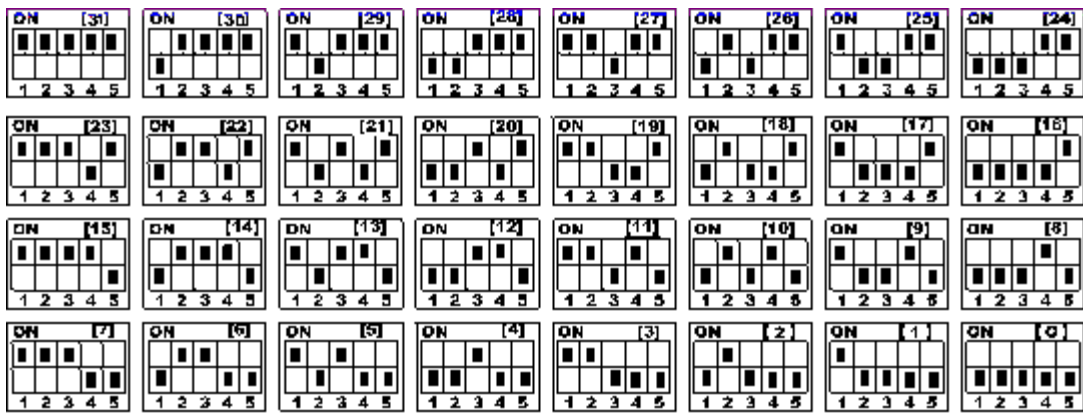


POWER GND 485+ 485- E+ IN1- IN1+ E- IN2- IN2+ IN3- IN3+ IN4- IN4+

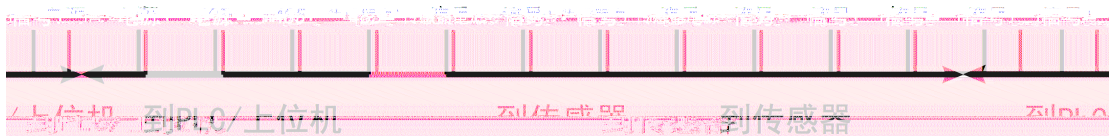

3	3	3		
D3	EF GH43			3
?3	I J A3			3
03	678K3	678	@K	3
63	678/3	678	L/	3
83	HK3			3
M3	NJD/3		D	3
.3	NJDK3		D	3
73	H/3			3
03	NJ ?/3		?	3

D13	NJ ?K3	? 3
DD3	NJ 0/3	0 3
D?3	NJ 0K3	0 3
D03	NJ 6/3	6 3
D63	NJ 6K3	6 3

485

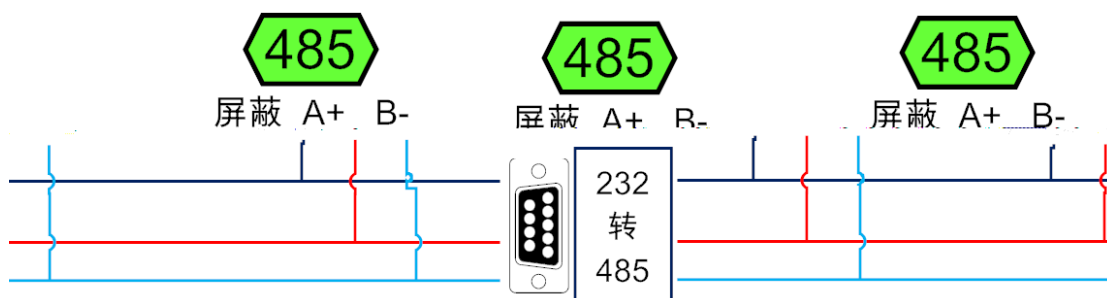

3

3

3	3
03	3
63	3
M3	3

3

	3	3	3
	3	OD1113	3
	3	OD11?3	3
	3	OD1103	D/00 PQ 3
	3	OD1163	D/?1 1"D 3
@AR D3		010113	DM 3
		0101D3	DM 3
		0101?3	DM 3
@AR ?3		010103	DM 3
		010163	DM 3
		010183	DM 3
	?3	0101M3	DM 3



3	4=>	DM
	3	
D	3	UH16111111D?8R83
3		UH31631?3113113@A3?63
?	3	UH16111D111D.6183
0	3	UH16111?111D76183
6	3	UH161110111DA8R83
DC6	3	UH1611111116H8RM3

UH16111111D?8R8

3	3	3
UH3	3	3
163	16	3
113113	3	3
1131D3	3	3
?83R83	R4RDM3	3

UH31631?3113113@A3?63

3	3	3
UH3	3	3
163	16 3	1V7?3
1?3	3	DKS' /DTW?3
11S=PT311S=XT3	@A 3	=P =X3 3
@A3?63	R4RDM3	3

1.接通电源指示灯亮但是上位机软件无法连接模块:

检 几 键 3

- 678 @、L 连 否 确3
- 串 、停止 、 验方 否 确3
- 与上 机 否 致3
- 678 走 长没 加屏蔽 3

2.AD 字固定为某个大数值，该数值不随传感器变化

- 3 连 3
- 3 已经损坏3

3.AD 字波动大无法校准、测量

- 3 、或纹 大3
- 3 不良3
- 3 走 长 未加屏蔽 3
- 3 不稳 3

