





- 
- 
- 
- 
  
- 
- 
- 

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |

|  |  |
|--|--|
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |

10 9 8 7 6 5  
AD1 AD2 GND DA1 DA2 GND


**JY-DAM0202A0**  
JU YING ELECTRONIC

模拟输入输出板


- 供电电压：DC 12-30V
- 输入：■ 4-20mA ■ 0-10V ■ 0-5V
- 输出：■ 4-20mA ■ 0-10V ■ 0-5V
- 通信协议：MODBUS RTU/TCP
- 通信端口：■ RS232 ■ RS485 ■ WIFI

电源 + - A/TX B/RX  
1 2 3 4

1 R 232

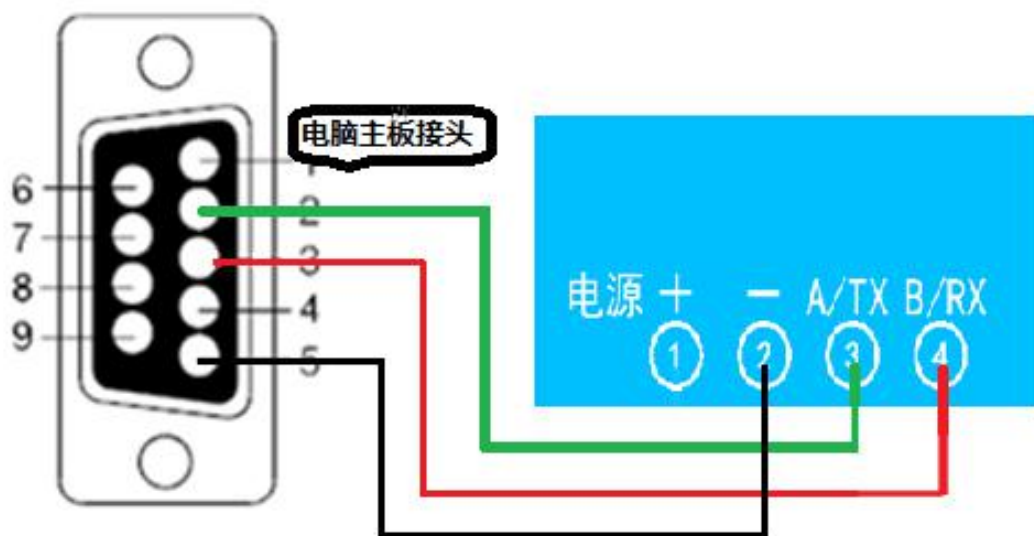



## 2 R 485

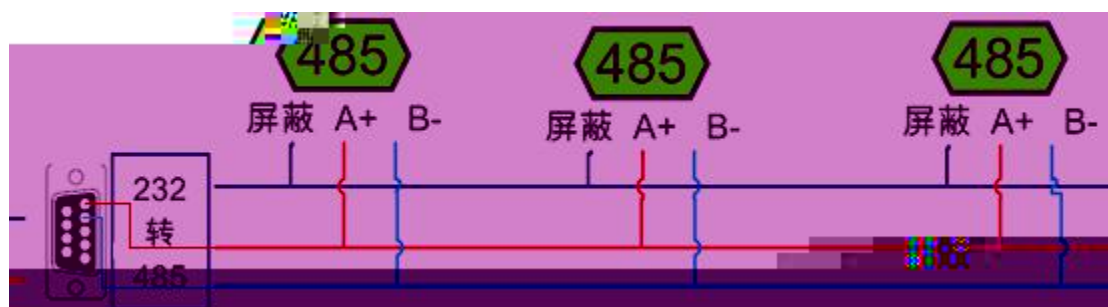

1


2

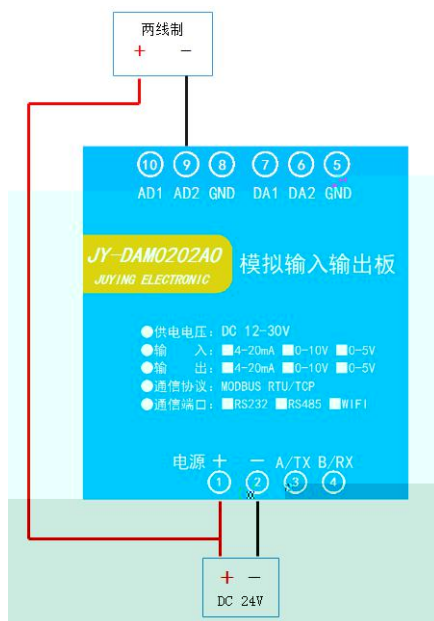

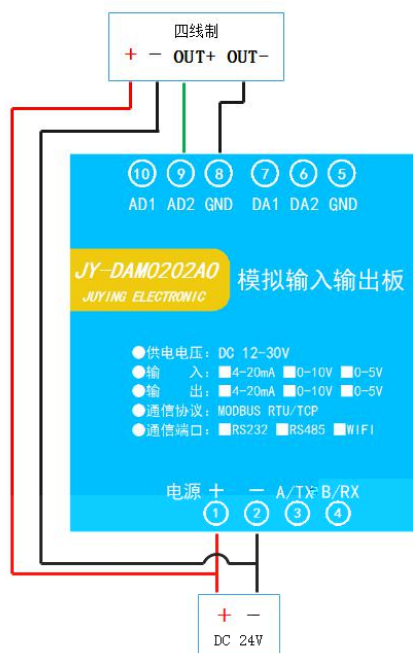

1


2

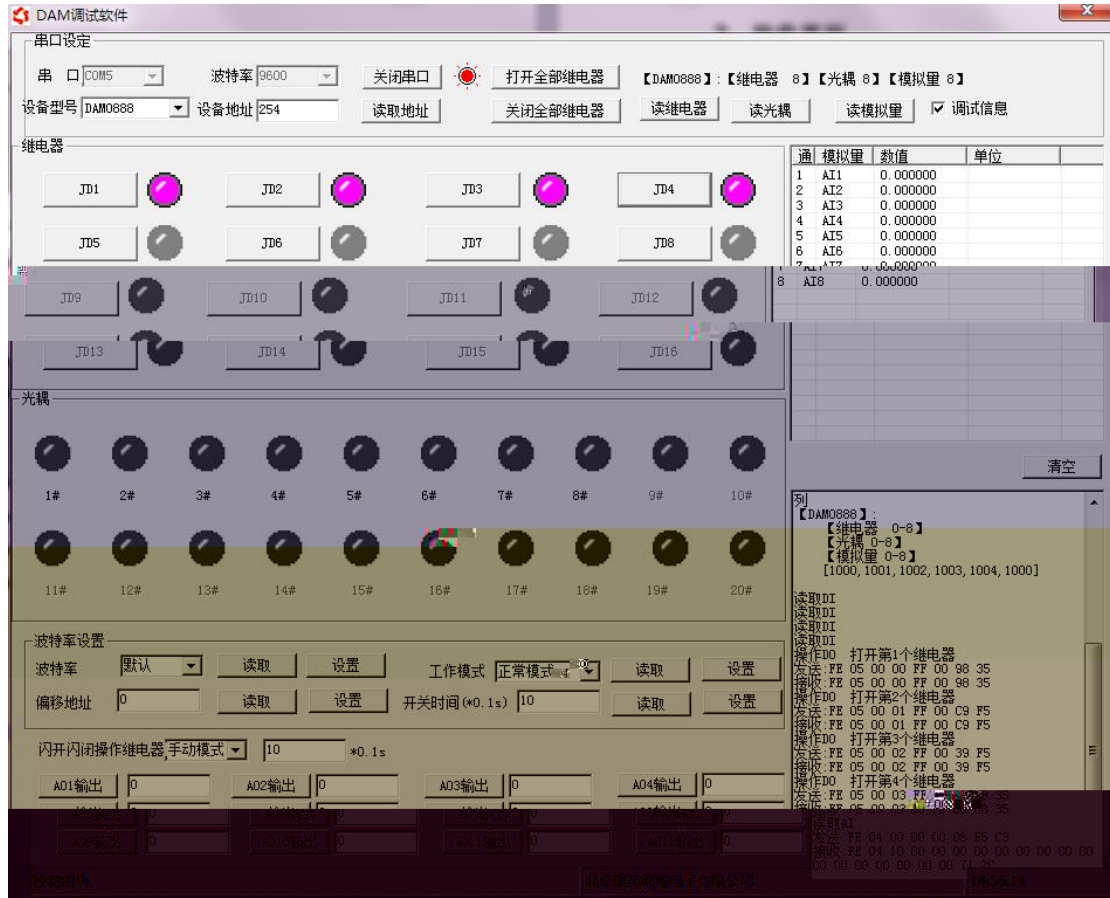


3





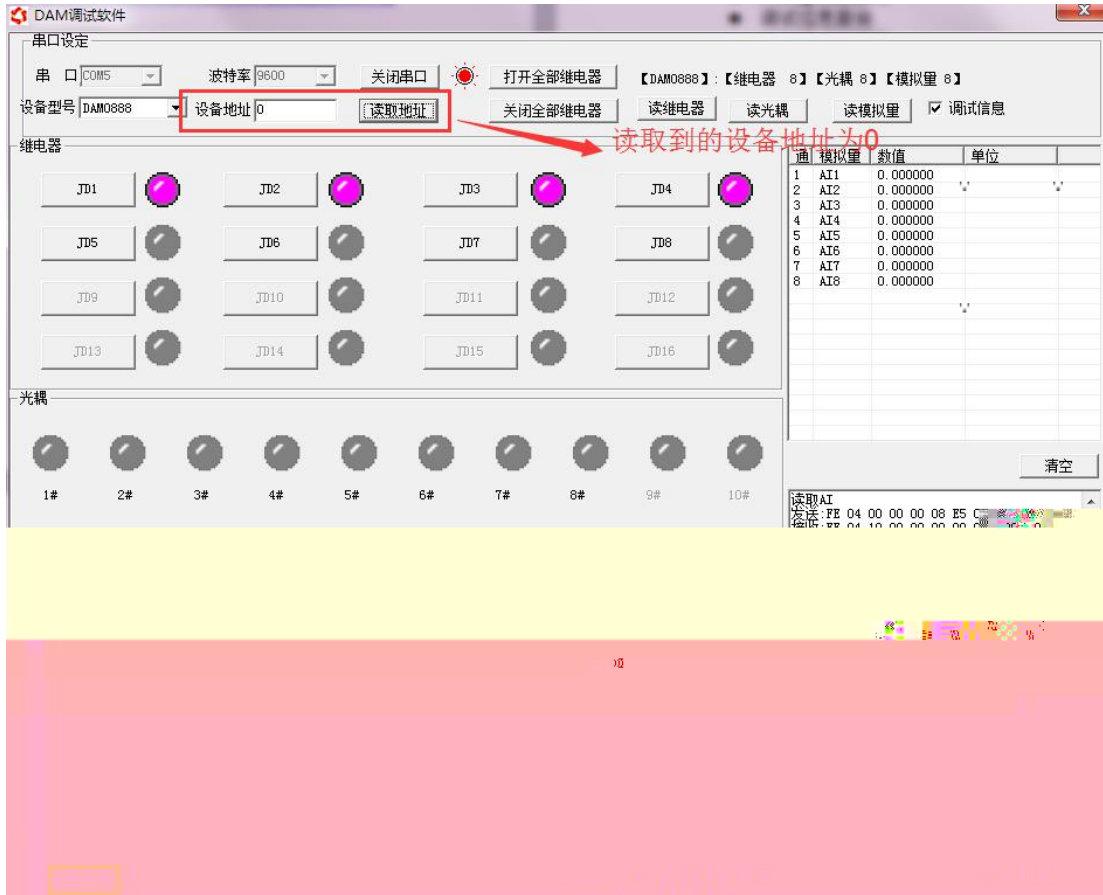

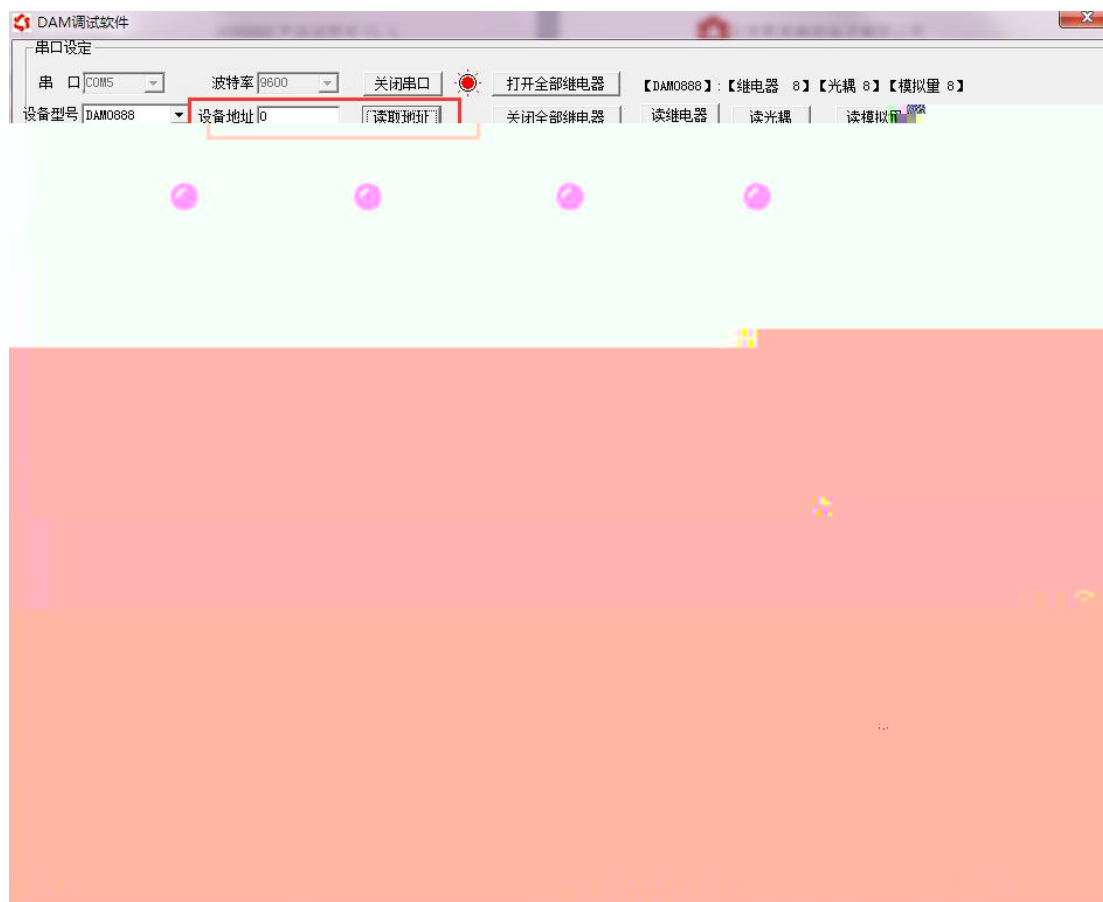

2




1


2 M

|  |  |
|--|--|
|  |  |
|  |  |
|  |  |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

3

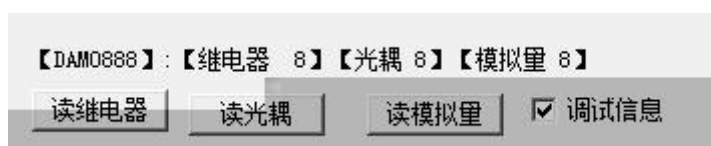

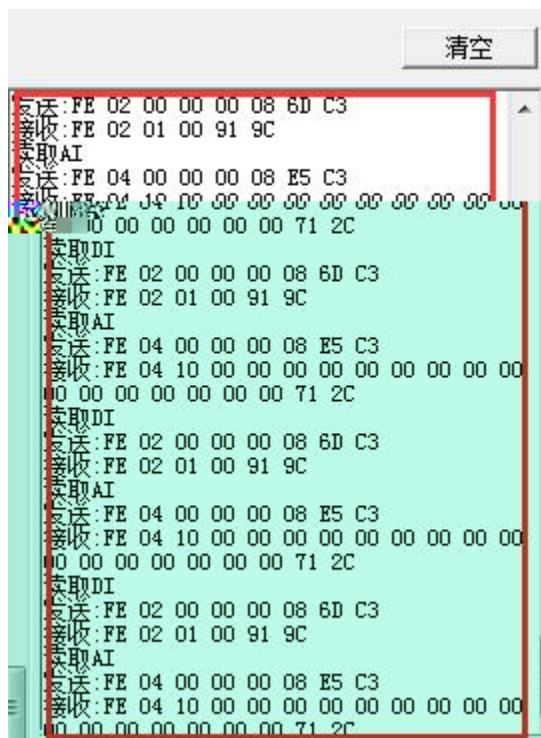



|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |