



JY-DAM1600

JUYING ELECTRONIC

16路继电器控制器

- 供电电压：DC 7-30V
- 输出：250V 10A触点
- 通信协议：MODBUS RTU
- 通信端口：
 - RS232
 - RS485
 - RF
 - 网口
 - WIFI
 - USB

电源 RS485 RS232


+ - PB A+ B- G TX RX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



OUT16 OUT15 OUT14 OUT13 OUT12 OUT11

⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳

1

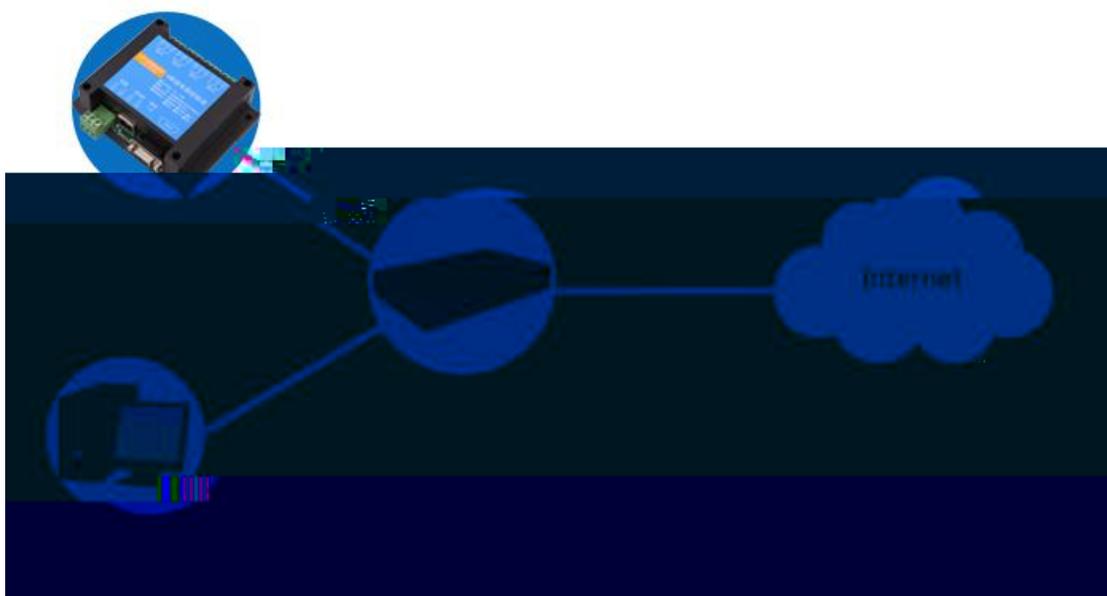

2

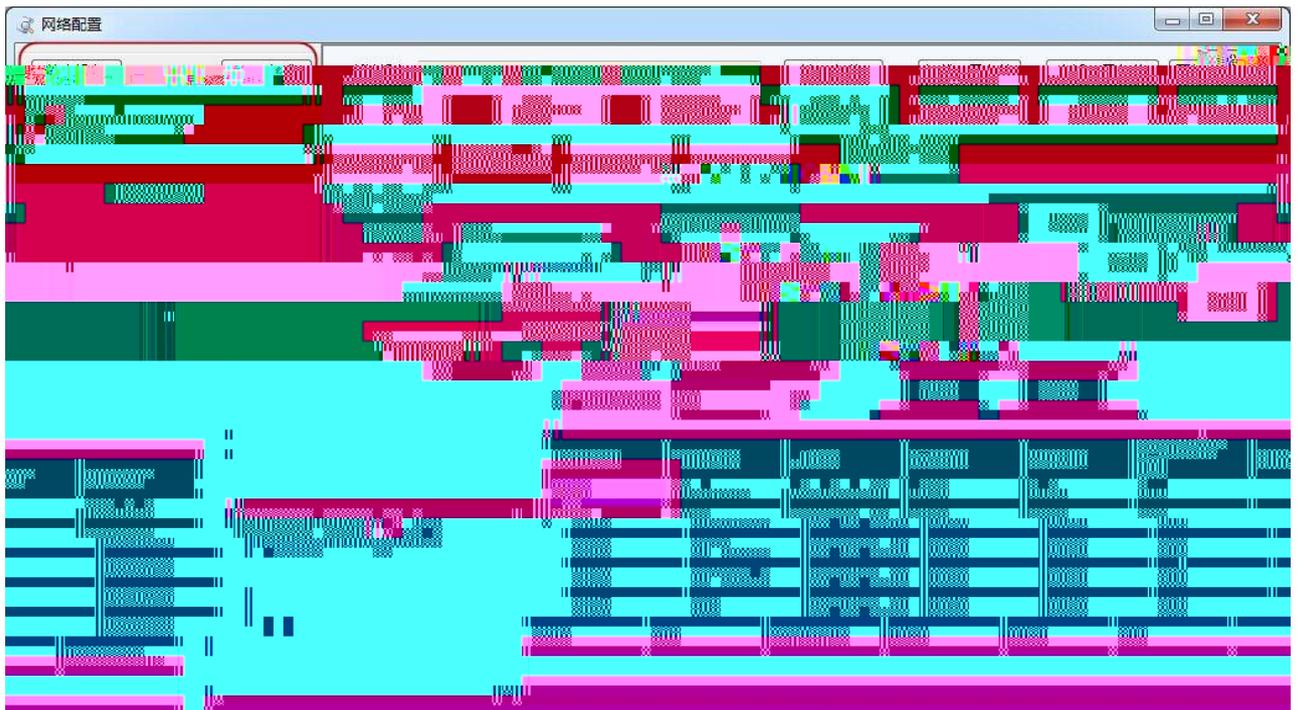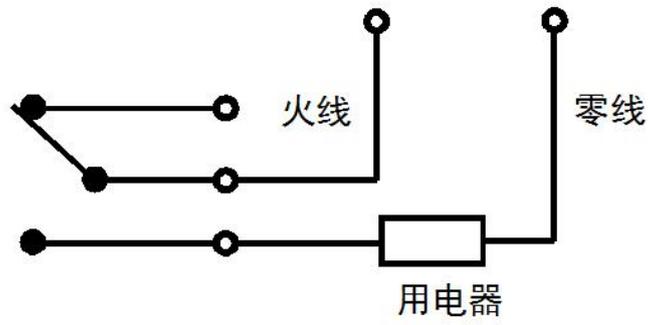



1

2

2.1.1


2.1.2

2.1.3

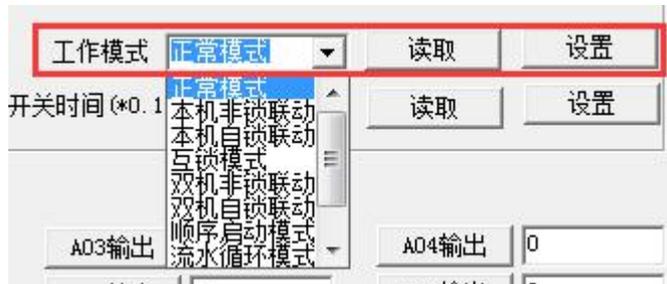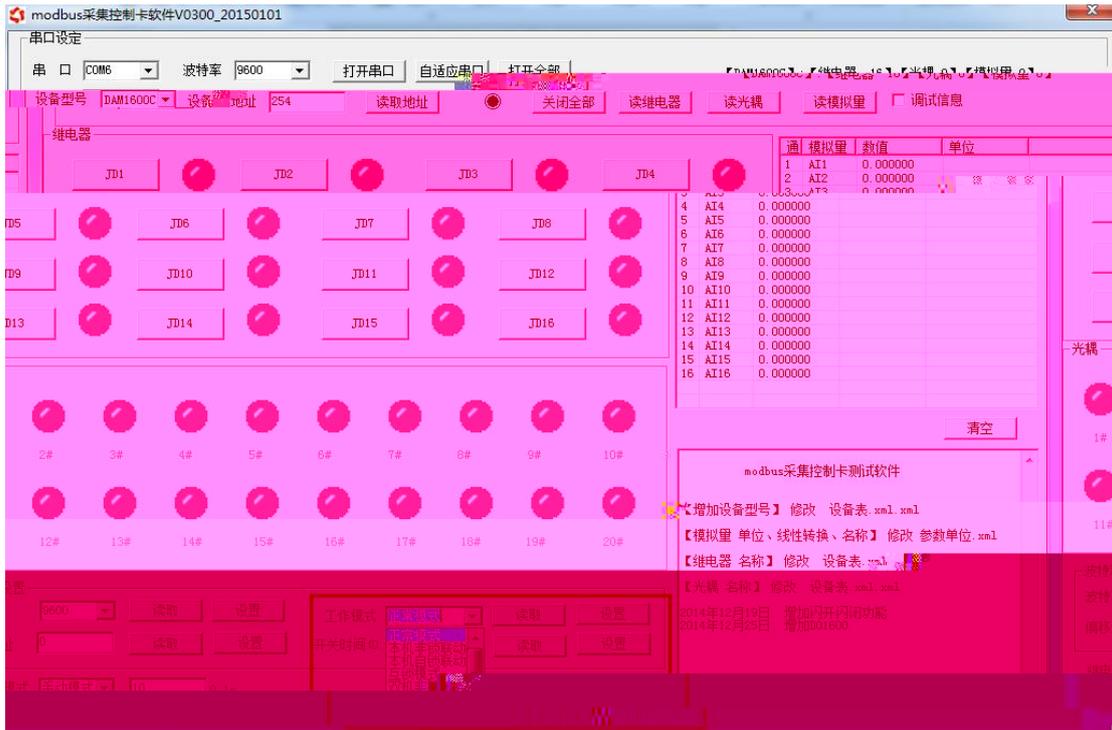




2

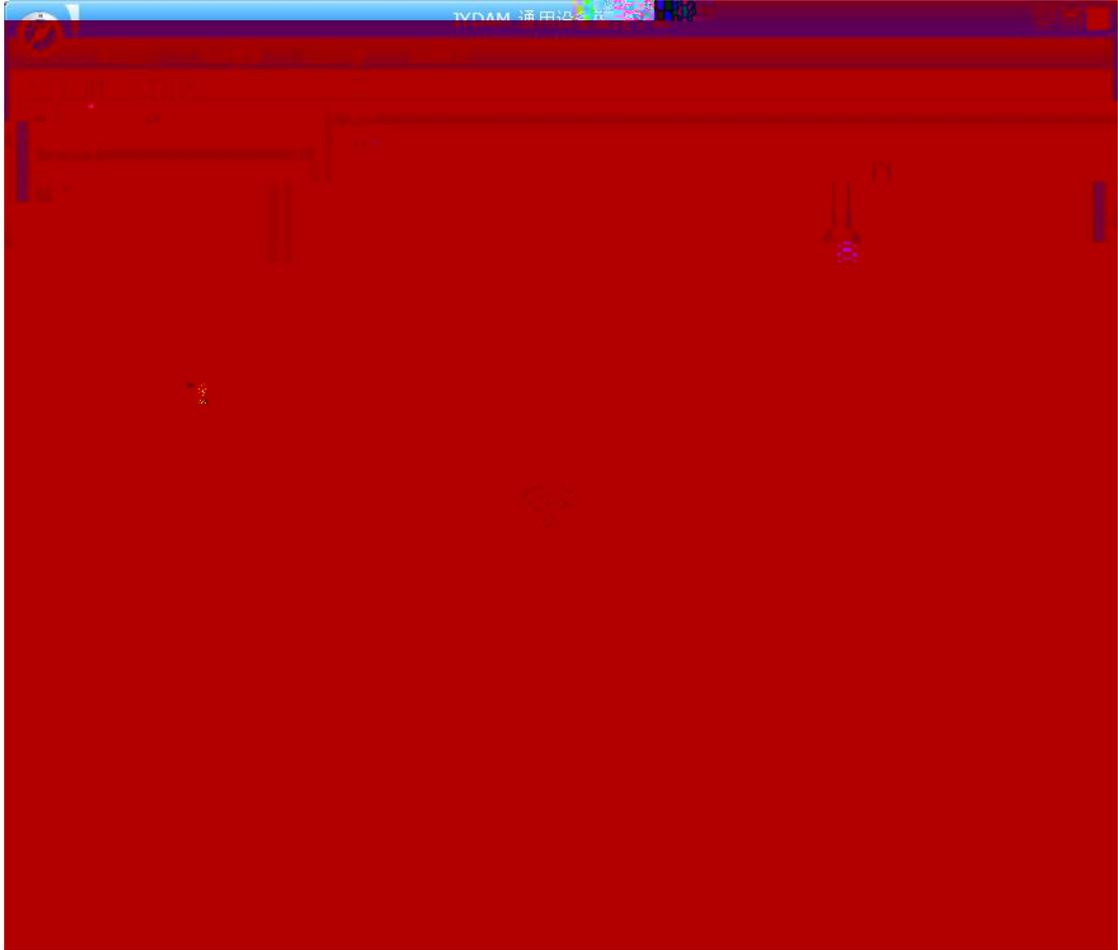

3

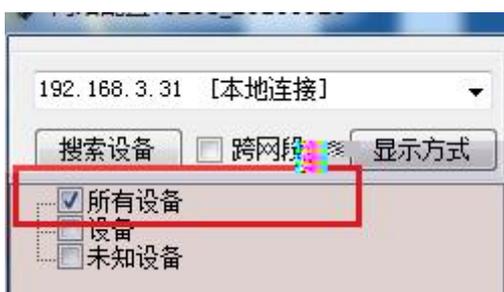

基本配置信息	网络连接配置	串口配置信息
基本信息		
唯一ID:	JYUNID	
产品型号:	JYUNID	
系统版本:	JYUNID	
设备名称:	JYNet-002	
设备地址:	200	
网络配置		
MAC地址:	ff ff ff ff ff ff	(?)
DHCP服务:	静态IP	
静态 IP:	192 . 168 . 3 . 232	
子网掩码:	255 . 255 . 255 . 0	(?)
网 关:	192 . 168 . 3 . 1	(?)
<p>点击两次</p> <p><input type="button" value="读取参数"/> <input type="button" value="下载参数"/> <input type="button" value="高级配置"/></p>		

