





- 
- 
- 
- 
- 
- 
- 
- 
- 


- 
- 
- 
- 
- 
- 
- 
- 
- 



### 一、使用移动网络



### 二、使用WIFI或者有线网络

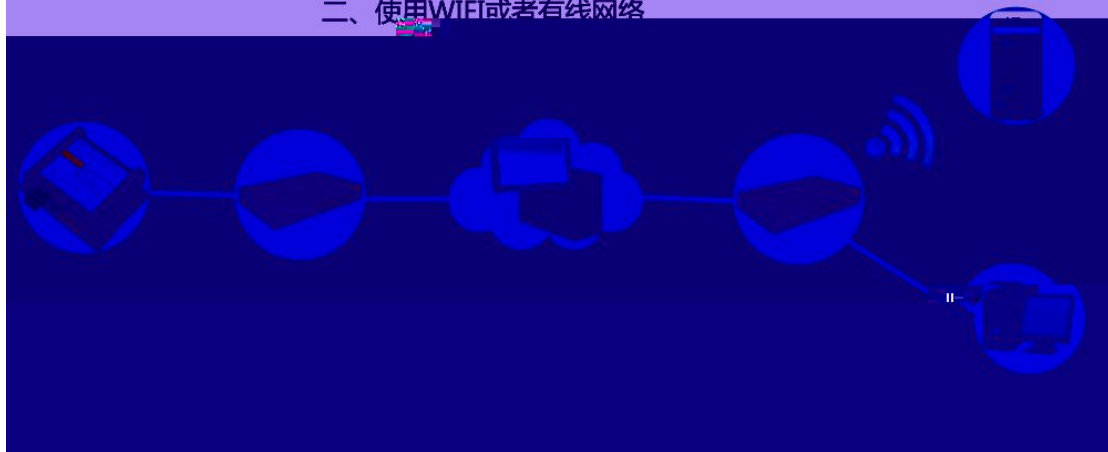

1


**JY-DAM1600**  
JUYING ELECTRONIC

### 16路继电器控制器

- 供电电压：DC 7-30V
- 输出：250V 10A触点
- 通信协议：MODBUS RTU
- 通信端口：
  - RS232 ■ RS485 ■ RF
  - 网口 ■ WIFI ■ USB

电源 RS485 RS232 OUT16 OUT15 OUT14 OUT13 OUT12 OUT11  
 + - PB A+ B- G TX RX ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑳

2

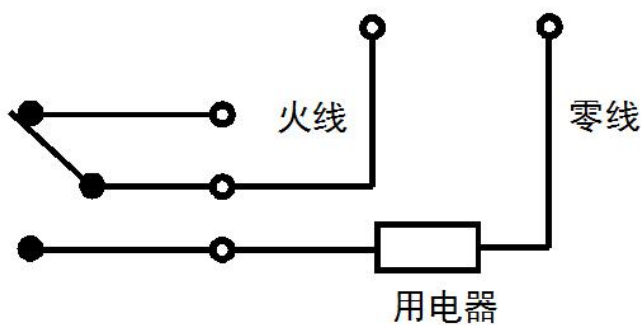

# 无线网

电子  
ELECTRONIC

WIIF+网口

1




2





备注	串口号	串口参数	串口状态	网络协议	目标IP	目标端口	本地端口	串口接收	网络接收	网络状态	注册ID
	COM4		未使用	TCP Client	192.168.3.200	10000	--	0	90	已连接	0

唯一ID

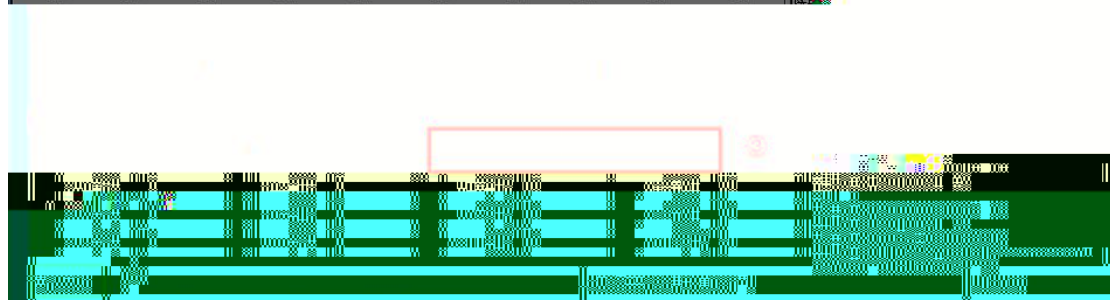



1

## 2 Modbus



!B

<A>

5

FP



**4**



---

---

---

---

---

