








## 一、使用移动网络

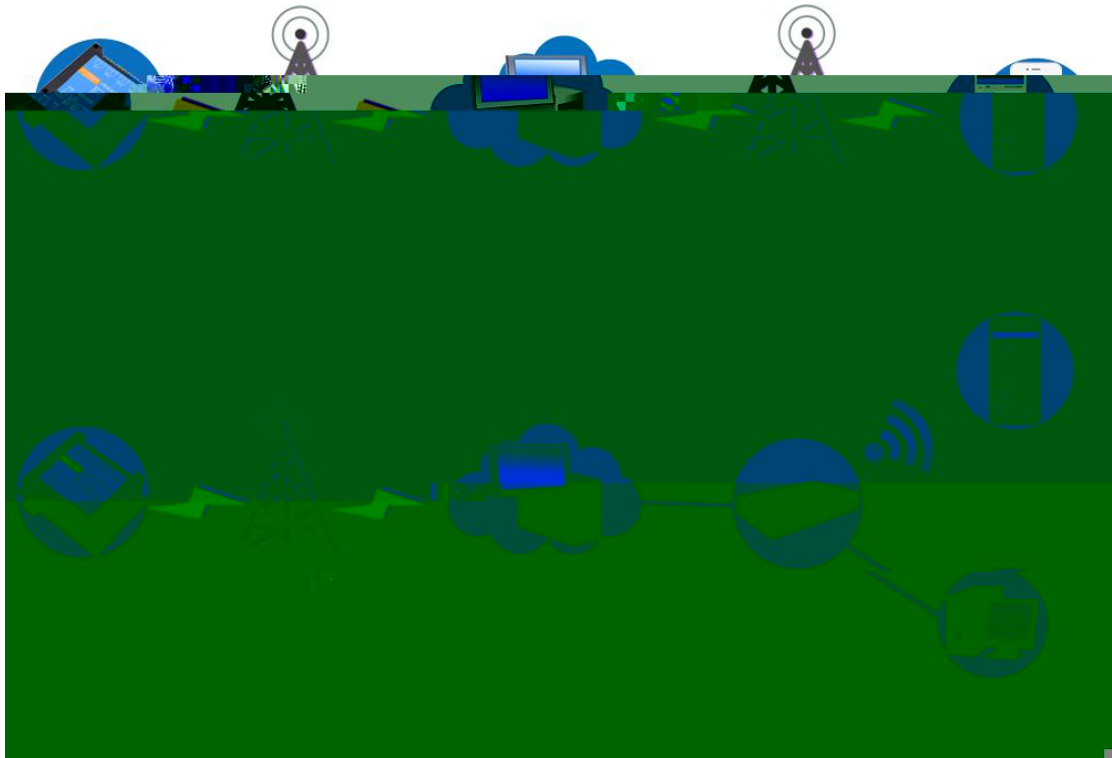




**GSM1600C**  
JUYING ELECTRONIC

### 继电器控制器

- 供电电压：DC 7-30V
- 输出：16路继电器
- 触点容量：AC 250V/10A

电源 + - (1) (2) SIM卡  
 RS232 G TX RX (6) (7) (8)  
 OUT16 OUT15 OUT14 OUT13 OUT12 OUT11 (9) (10) (11) (12) (13) (14) (15) (16) (17) (18) (19) (20)

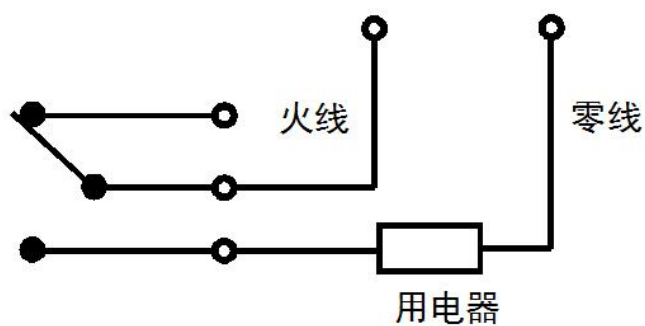



手机扫描二维码  
获取设备唯一ID号

10-28 10:07

送达

\*JY#30#

10-28 10:07


\*JY:30#UNID:JY05GG50tA4nDRY5  
CSQ:26  
GPS:0,0.











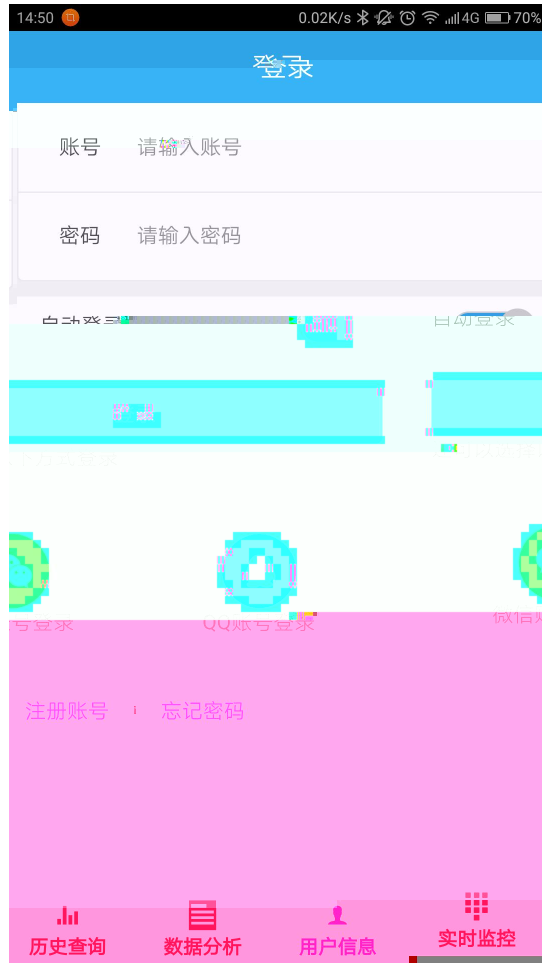



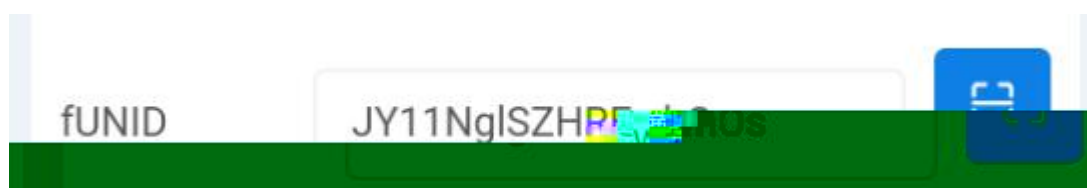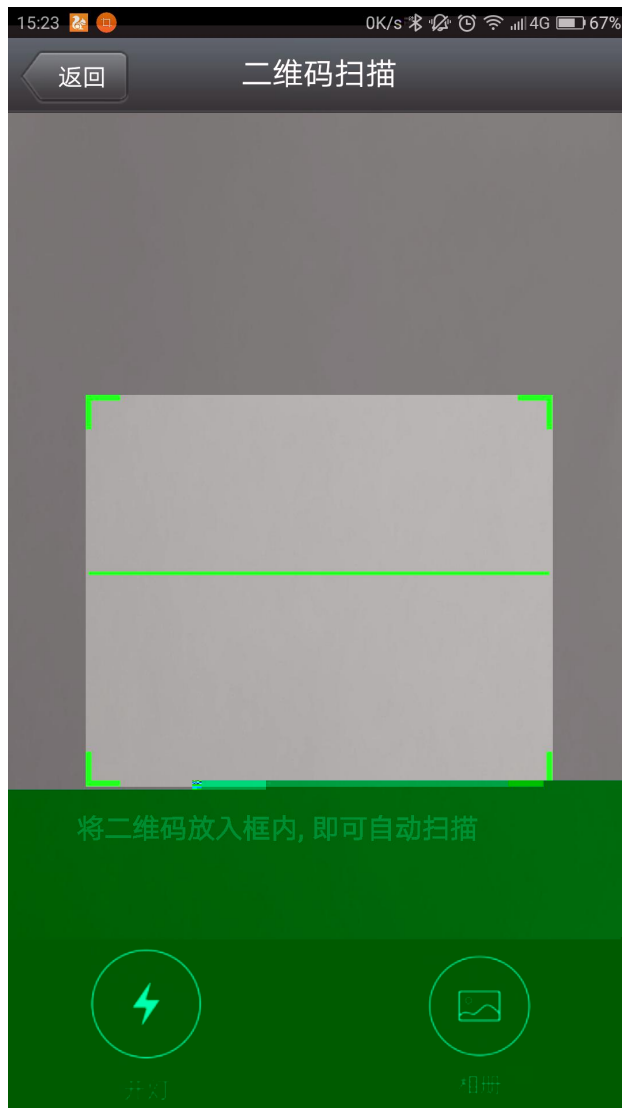





通道  
序号

通道

通道序号	电流值1	电流值1 对应数据	电流值2	电流值2 对应数据
通道	4000	0	20000	100











